

Klüberfood NH1 M 4-100, -150, -220 N

High-performance oils for high-speed can seaming machines



Your benefits at a glance

- Compliance with the highest food safety standards due to NSF H1 registration and ISO 21469 certification
- Reduced formation of sludge and increased oil lifetime due to excellent oxidation stability and modern oil technology
- Increased component lifetime due to good corrosion protection also in corrosive media
- Excellent wear protection
- Efficient and quick separation from water and beverages in the oil reservoir

Your requirements - our solution

Modern seaming machines are designed to achieve high production speeds in order to meet the requirements of the leading beverage companies. However, increased mechanical stresses and the effects of different beverages on components can compromise the performance and the lifetime of mechanical parts.

High-performance seaming oils are required to ensure the lowest maintenance efforts and achieve maximum machine reliability at your production site. Based on a modern base oil concept and a highly efficient additive package, Klüberfood NH1 M 4 N oils show reduced formation of residues and sludge. Thus they support you as an operating company in improving the efficiency of your production process.

Water, beverages and foodstuffs can contaminate the oil circulation system, which is why the lubricating fluid needs to be regularly circulated through a filter. The formulation of Klüberfood NH1 M 4 .. N enables the oil to perform its critical function of creating a lubricating film on the component surfaces even in the presence of water or beverages.

The product is designed to quickly separate from contaminants in the oil reservoir so they can be more easily removed.

Klüberfood NH1 M 4-100, -150, -220 N oils are NSF H1 registered and therefore comply with FDA 21 CFR § 178.3570. The lubricants were developed for incidental contact with products and packaging materials in the food-processing, cosmetics, pharmaceutical or animal feed industries. The use of Klüberfood NH1 M 4-100, -150, -220 N oils can contribute to

increase the reliability of your production processes. Nevertheless we recommend conducting an additional risk analysis, e.g. HACCP.

Application

Lubrication of can seaming machines with either recirculating or total loss systems, especially for those systems where contamination by water or beverages occurs, making filtration necessary. Circulating oil systems for bearings, chains and open gears of machinery in the food and beverage industry.

Application notes

We recommend Klüberfood NH1 M 4-100, -150, -220 N oils to be used in compliance with the instructions of the equipment supplier. Try to start with a clean or fully drained system. Always check compatibility of Klüberfood NH1 M 4-100, -150, -220 N oils with the previous or current lubricant in the system. Make sure that all filters are changed after an oil change in a recirculating filtration system.

Material safety data sheets

Material safety data sheets can be requested via our website www.klueber.com. You may also obtain them through your contact person at Klüber Lubrication.

Pack sizes	Klüberfood NH1 M 4-100 N	Klüberfood NH1 M 4-150 N	Klüberfood NH1 M 4-220 N
Drum, steel 208 l	+	+	+
Canister 19 l	+	+	+

Klüberfood NH1 M 4-100, -150, -220 N

High-performance oils for high-speed can seaming machines


Product data	Klüberfood NH1 M 4-100 N	Klüberfood NH1 M 4-150 N	Klüberfood NH1 M 4-220 N
Article number	029083	029084	029085
Appearance	clear	clear	clear
Chemical composition, type of oil	synthetic hydrocarbon oil	synthetic hydrocarbon oil	synthetic hydrocarbon oil
Demulsifying capacity, DIN ISO 6614, ASTM D 1401 at 82 °C	40/40/0 (15) ml	40/40/0 (15) ml	40/40/0 (20) ml
Density, DIN 51757, 20 °C	approx. 0.848 g/cm ³	approx. 0.85 g/cm ³	approx. 0.849 g/cm ³
Colour space	yellow	yellow	yellow
FZG scuffing test, DIN ISO 14635-1, A/8.3/90, scuffing load stage	>= 12	>= 12	>= 12
ISO viscosity grade, DIN ISO 3448	100	150	220
Kinematic viscosity, DIN 51562 pt. 01/ASTM D-445/ASTM D 7042, 100 °C	approx. 14 mm ² /s	approx. 20 mm ² /s	approx. 27 mm ² /s
Kinematic viscosity, DIN 51562 pt. 01/ASTM D-445/ASTM D 7042, 40 °C	approx. 100 mm ² /s	approx. 150 mm ² /s	approx. 220 mm ² /s
Anti-corrosion properties on steel, ASTM D665 B, 24h/60°C	passed	passed	passed
Copper corrosion, DIN EN ISO 2160, 3 h/100 °C	1 - 100 corrosion degree	1 - 100 corrosion degree	1 - 100 corrosion degree
NSF-H1 registration	157 537	157 541	157 543
Upper service temperature	150 °C / 302 °F	150 °C / 302 °F	150 °C / 302 °F
Oxidation stability (Rotating Pressure Vessel Oxidation Test, RPVOT), ASTM D2272, operating time at 150°C	>= 1 400 min	>= 1 400 min	>= 1 400 min
Lower service temperature	-30 °C / -22 °F	-30 °C / -22 °F	-30 °C / -22 °F
Minimum shelf life from the date of manufacture - in a dry, frost-free place and in the unopened original container, approx.	36 months	36 months	36 months





Klüberfood NH1 M 4-100, -150, -220 N

High-performance oils for high-speed can seaming machines

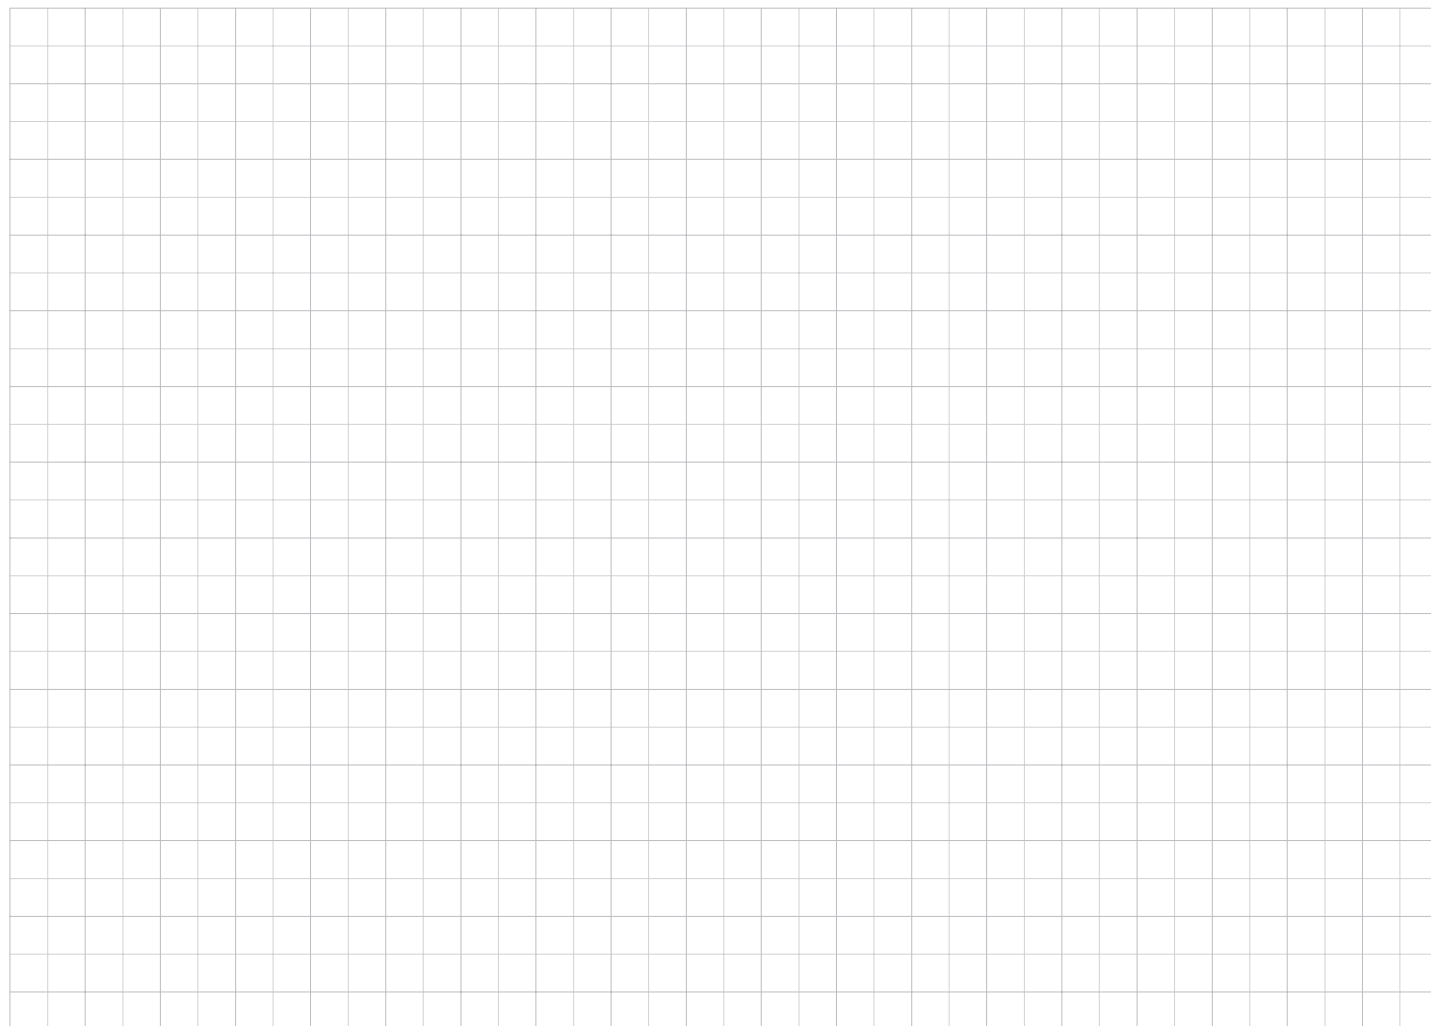

Klüber Lubrication – your global specialist

Innovative tribological solutions are our passion. Through personal contact and consultation, we help our customers to be successful worldwide, in all industries and markets. With our ambitious technical concepts and experienced, competent staff we have been fulfilling increasingly demanding requirements by manufacturing efficient high-performance lubricants for more than 80 years.

**Klüber Lubrication München SE & Co. KG /
Geisenhausenerstraße 7 / 81379 München / Germany /
phone +49 89 7876-0 / fax +49 89 7876-333.**

The data in this document is based on our general experience and knowledge at the time of publication and is intended to give information of possible applications to a reader with technical experience. It constitutes neither an assurance of product properties nor does it release the user from the obligation of performing preliminary field tests with the product selected for a specific application. All data are guide values which depend on the lubricant's composition, the intended use and the application method. The technical values of lubricants change depending on the mechanical, dynamical, chemical and thermal loads, time and pressure. These changes may affect the function of a component. We recommend contacting us to discuss your specific application. If possible we will be pleased to provide a sample for testing on request. Klüber products are continually improved. Therefore, Klüber Lubrication reserves the right to change all the technical data in this document at any time without notice.

Publisher and Copyright: Klüber Lubrication München SE & Co. KG. Reprints, total or in part, are permitted only prior consultation with Klüber Lubrication München SE & Co. KG and if source is indicated and voucher copy is forwarded.