


## OKS 510

### MoS<sub>2</sub> Bonded Coating, fast-drying

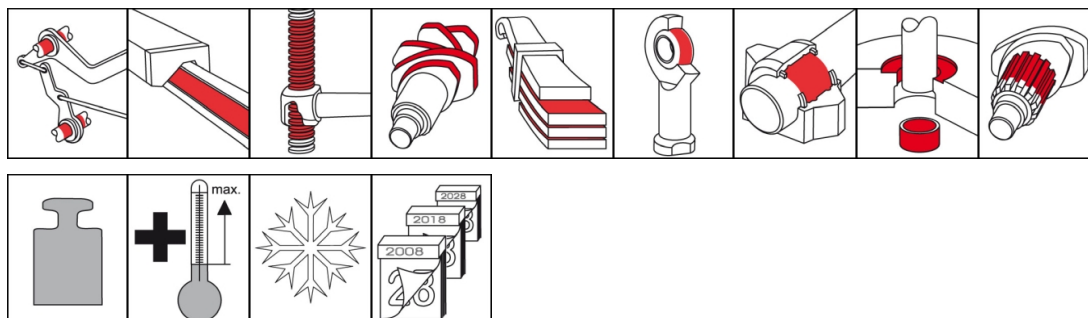

#### Description

Air-drying bonded coating on MoS<sub>2</sub> basis for dry lubrication of machine elements at temporary operation and long standstill periods.

#### Applications

- Run-in lubrication in combination with oil or grease lubrication
- Dry lubrication at sliding pairs, in particular under heavy loads and low sliding speeds, at oscillating movements or intermittent operation
- Dry lubrication at high operating temperatures (up to 450°C), shorter sliding paths and low speeds
- Dry lubrication in dusty environment, to avoid adhesions
- Coating of punching tools

#### Advantages and benefits

- Highly effective due to good adhesion to prepared substrates
- Allows a low coefficient of sliding friction also under heavy loading
- Increased wear protection
- Radiation and vacuum-resistant
- Shortens and improves run-in conditions of friction bearings, toothings and other sliding pairs
- Also available as spray version OKS 511

#### Branches

- Shipbuilding and marine technology
- Iron and steel industry
- Rail vehicle technology
- Chemical industry
- Rubber and plastic processing
- Paper and packaging industry
- Logistics
- Plant and machine (tool) engineering
- Glass and foundry industry
- Municipal services

#### Application tips

For best adhesion, clean the surfaces mechanically first and then with OKS 2610/OKS 2611 universal cleaner. The surfaces to be treated must be bright metal and dry, surface roughnesses of 5-10 µm have proved to be favourable. Chemical or mechanical pre-treatment of surfaces may extend the service life of the non-stick paint. Stir the paint thoroughly before use. At OKS 510 apply in an evenly thin film to the prepared surfaces, preferably by spraying or dipping, in individual cases also by brush. Spray on evenly OKS 511 spray. Avoid excesses. Drying and curing conditions as per the following technical data.

# OKS 510

## MoS<sub>2</sub> Bonded Coating, fast-drying

### Packaging

- 500 g Can
- 5 kg Hobbock
- 25 kg Hobbock

### Technical data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
binder				silicone resin
solvent				butyl acetate
solvent				benzine
solid lubricants				MoS <sub>2</sub>
solid lubricants				graphite
<b>Application related technical data</b>				
flashing point	DIN 51 755 (-2)	< 65 (< 5°C)	°C	-30
lower operating temperature			°C	-180
upper operating temperature			°C	450
optimal layer thickness	DIN 50 981/50 984	DIN 50 982-2	µm	10-15
surface covering			m <sup>2</sup> /kg	10-50
processing temperature			°C	20-25
drying time			min	30
colour				grey-black
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.96
press-fit test (µ)	draft DIN 51 833			0.07, no chatter

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
 82216 Maisach  
 ☎ +49 8142 3051 - 500  
 ✉ [info@oks-germany.com](mailto:info@oks-germany.com)  
 🏠 [www.oks-germany.com](http://www.oks-germany.com)

a brand of  
 **FREUDENBERG**

The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Product restricted to professional users.** Safety data sheet available for download at [www.oks-germany.com](http://www.oks-germany.com)  
 Our Customer and Technical service will be pleased to help should you have any further questions.